


TYP JOINT DETAIL

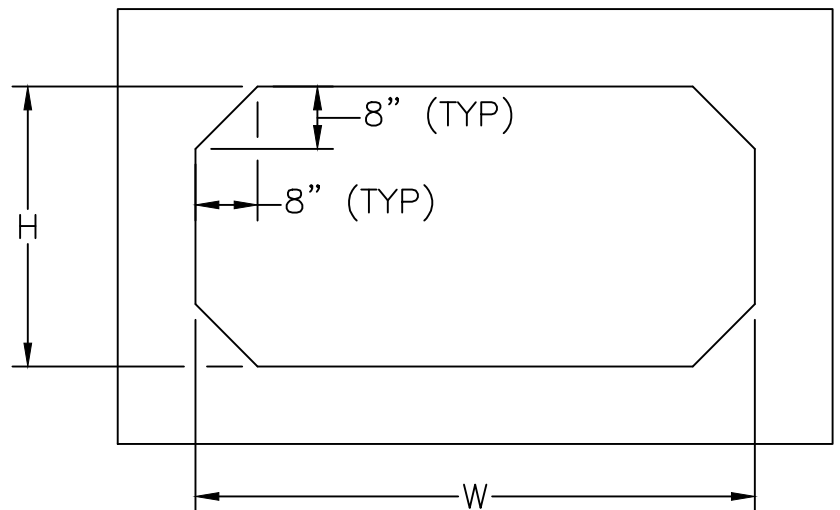

END VIEW

DESIGNED FOR LOADS/SIZES
AS NEEDED

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS
2. DESIGN PER ASTM C1433 BOX CULVERT
3. ALL REINFORCEMENT PER ASTM A615
4. DESIGNED FOR AASHTO HS-20 LOADING