


PLAN VIEW

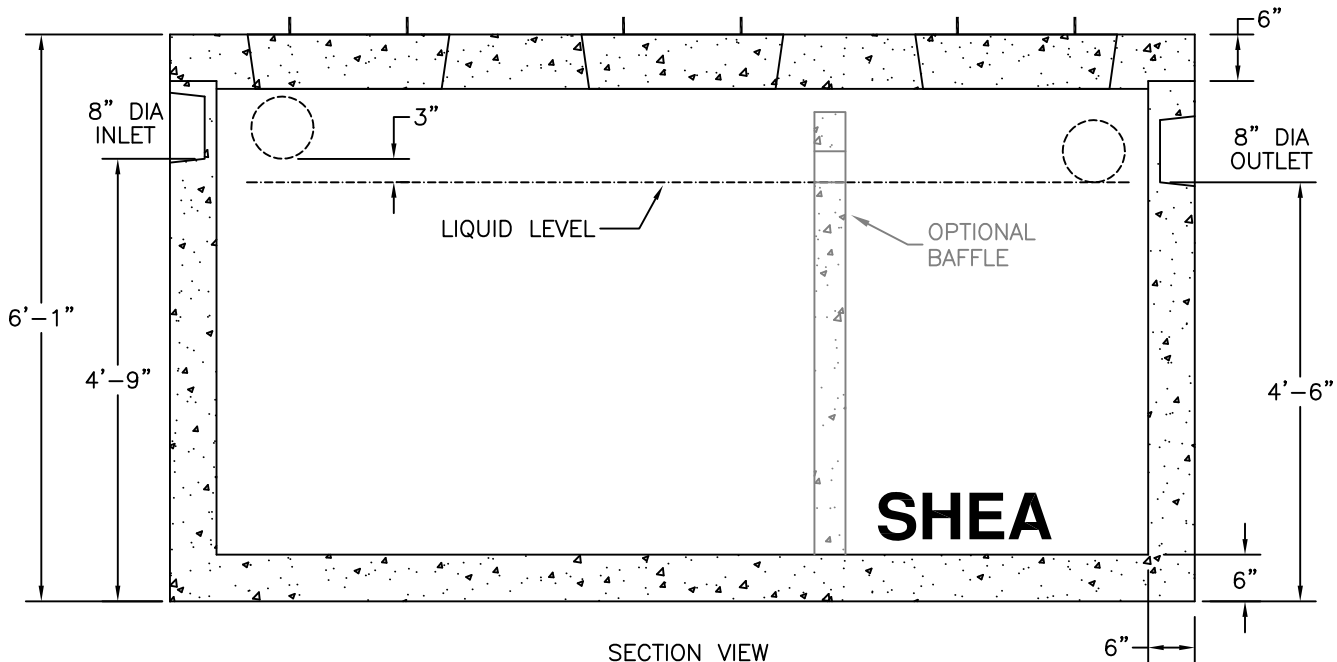

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. DESIGNED FOR H-20 LOADING.
5. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.

	WEIGHT
ITEM NO. TK-M1500C	22,840#
TK-M1500C2C	24,783#



*New England's Premier Precaster*  
 800-696-7432 (SHEA)  
 www.sheaconcrete.com

COMMERCIAL LINE TANK  
 1500 GALLON MONOLITHIC

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA  
 87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH  
 Mail to: PO Box 520-Wilmington, MA 01887

Page: 12

ctkM1500.dwg

02/01/2013

