


PLAN VIEW

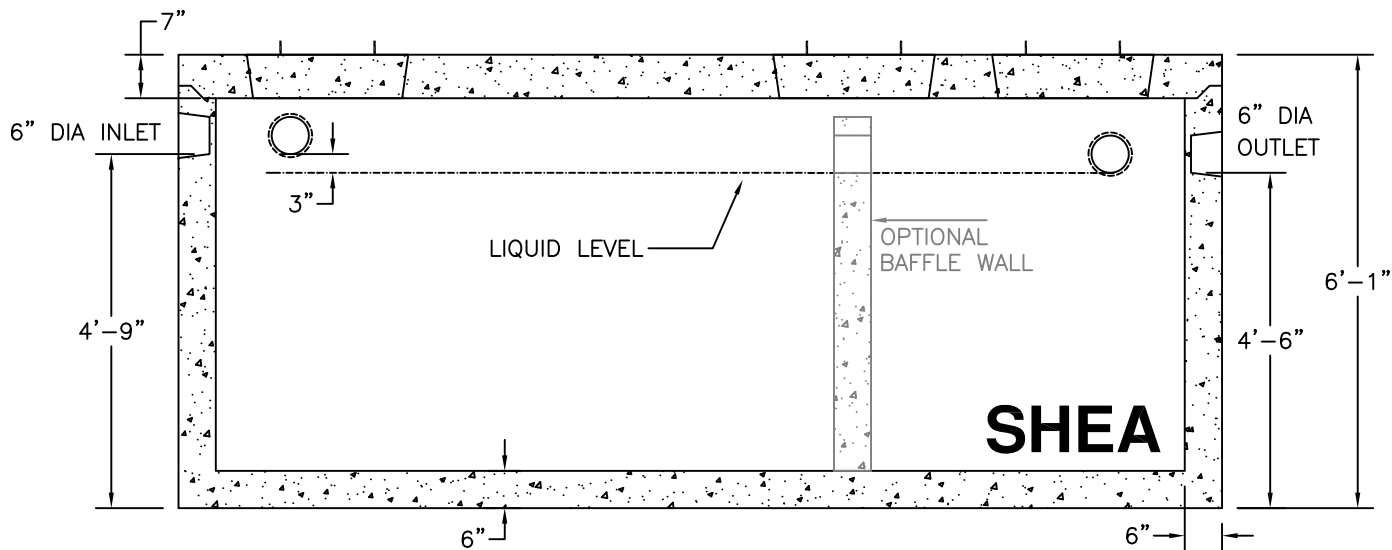

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. DESIGNED FOR H-20 LOADING.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
7. TEES AND BAFFLES SOLD SEPARATELY.

ITEM NO.	CTK-M2500C	WEIGHT
	CTK-M2500C2C	34,880#
		39,930#



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

COMMERCIAL LINE TANK
 2500 GALLON MONOLITHIC

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
 87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
 Mail to: PO Box 520-Wilmington, MA 01887

Page: I4

ctkM2500.dwg

02/01/2013

