


PLAN VIEW

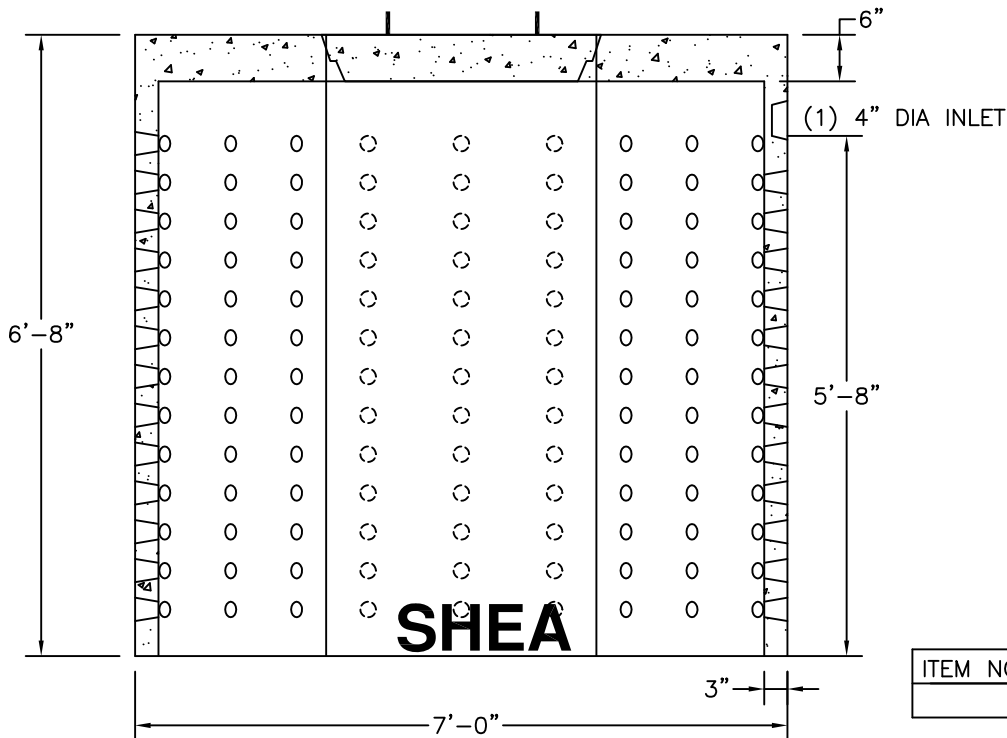

SHEA

		WEIGHT
ITEM NO.	DW 1500B	7,100#
	DW 1500BH	7,765#

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. REINFORCEMENT: #3 REBAR
3. AVAILABLE IN H-20 LOADING.



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

DRY WELL
 1500B

773 Salem Street
 P.O. Box 520
 Wilmington, MA 01887

87 Haverhill Road
 P.O. Box 807
 Amesbury, MA 01913

160 Old Turnpike Road
 Nottingham, NH 03290

Page: F6.2

dw1500B.dwg

1/13/2005

