


8' DIA

24" DIA  
INSPECTION COVER

PLAN VIEW

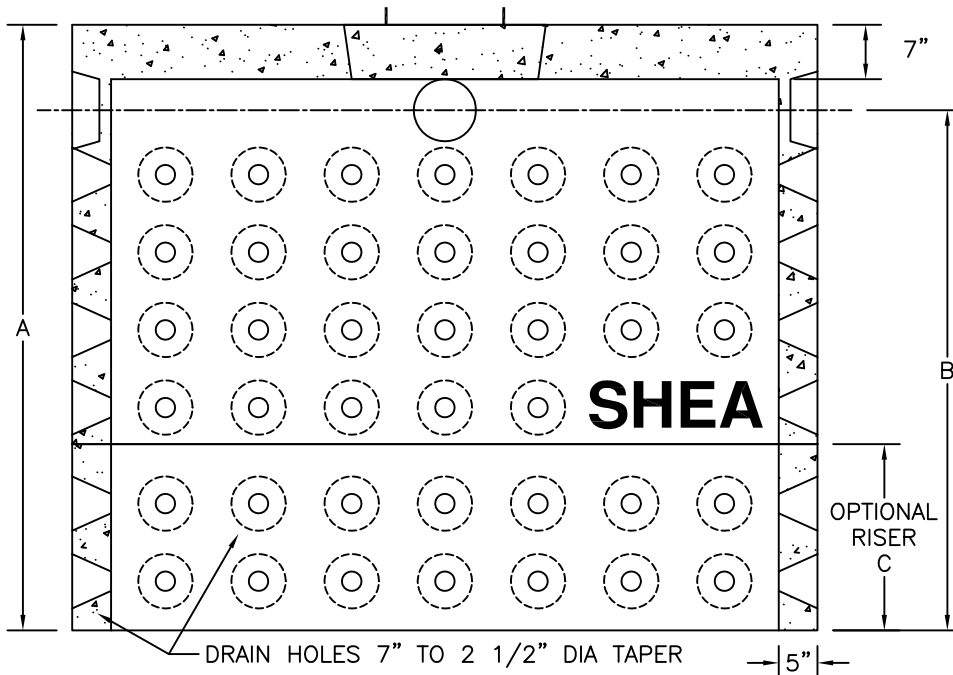

(4) 8" DIA INLET  
90° APART

OPTIONAL  
RISER  
C

DRAIN HOLES 7" TO 2 1/2" DIA TAPER

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGNED FOR H-20 LOADING, 1 TO 5 FEET OF COVER.

| GALLONS | A (HGT) | B (CL) | ITEM NO.     | WEIGHT  |
|---------|---------|--------|--------------|---------|
| 1000    | 4'-6"   | 3'-8"  | TK-1000CDW   | 10,270# |
| 1500    | 6'-2"   | 5'-4"  | TK-1500CDW   | 12,503# |
| 2200    | 9'-0"   | 8'-2"  | 1000+4'RISER | 15,506# |
| 2800    | 10'-8"  | 9'-10" | 1000+6'RISER | 18,230# |

| C     | ITEM NO.  | GALLONS | WEIGHT |
|-------|-----------|---------|--------|
| 4'-6" | TK-4RSCDW | 1200    | 5,236# |
| 6'-2" | TK-6RSCDW | 1800    | 7,960# |



New England's Premier Precaster  
800-696-7432 (SHEA)  
www.sheaconcrete.com

DRY WELL CYLINDRICAL  
8' DIAMETER COMMERCIAL LINE

773 Salem Street  
P.O. Box 520  
Wilmington, MA 01887

87 Haverhill Road  
P.O. Box 807  
Amesbury, MA 01913

160 Old Turnpike Road  
Nottingham, NH 03290

Page: F5

DW8Dia.dwg

11/30/2009

