


PLAN VIEW

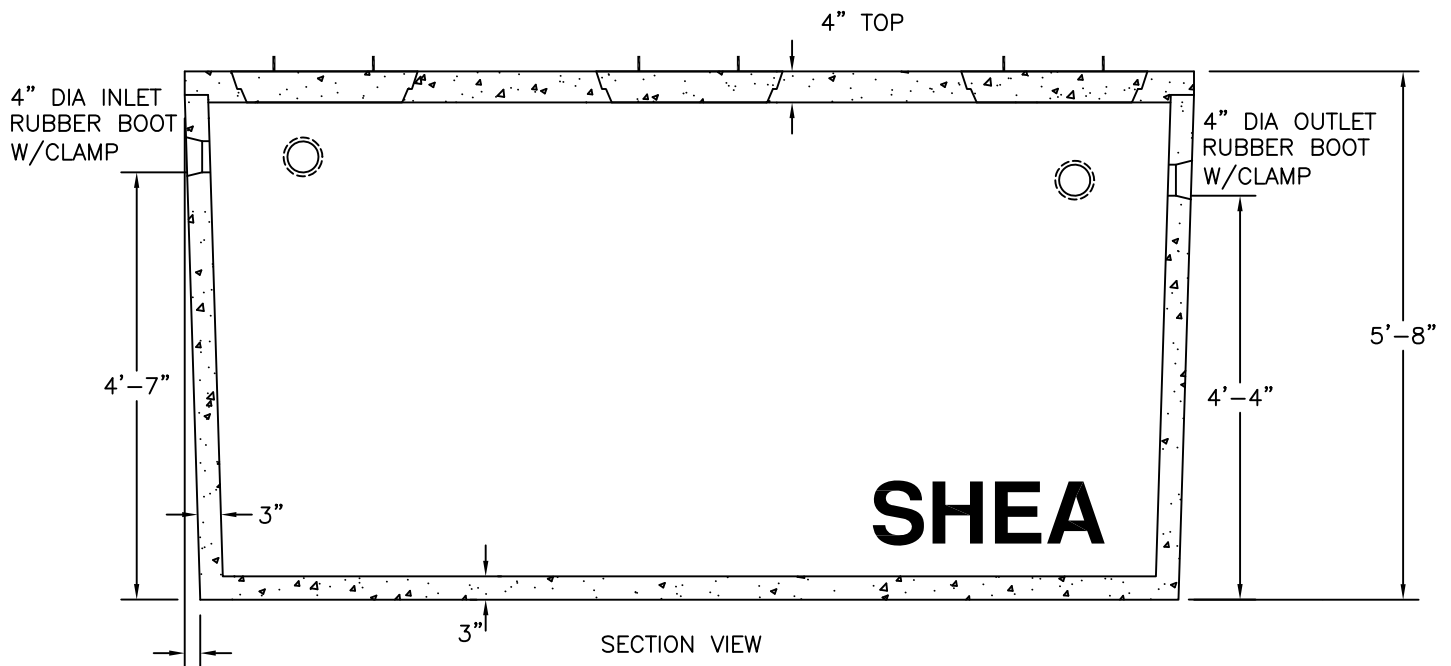

2" TAPER

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.000, DEP TITLE 5 REGS, FOR PUMP CHAMBERS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. ALSO AVAILABLE IN HEAVY DUTY.
5. JOINT SEALED WITH BUTYL RESIN.
6. PUMPS AND ACCESSORIES OPTIONAL.

		WEIGHT
ITEM NO. TK-M1500	STANDARD	11,035#



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

1500 GALLON PUMP CHAMBER
 MONOLITHIC 3" WALL

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
 87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
 Mail to: PO Box 520-Wilmington, MA 01887

Page: C5.1

pcM1500-3.dwg

04/28/2011

