


PLAN VIEW

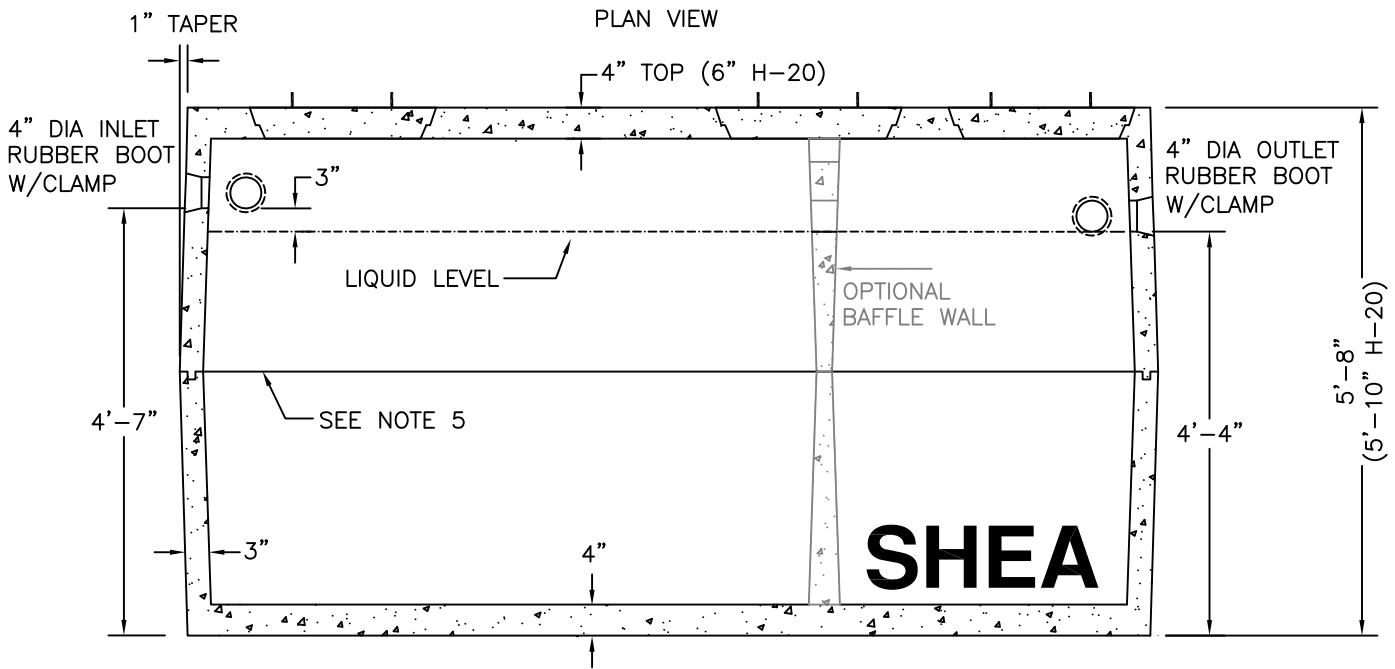

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

		WEIGHT
ITEM NO.	TK-1500 STANDARD	11,670#
	TK-1500H H-20	13,135#
	TK-15002C STANDARD	12,930#
	TK-15002CH H-20	14,395#



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

SEPTIC TANK
 1500 GALLON

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
 87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
 Mail to: PO Box 520-Wilmington, MA 01887

Page: B1.4

tk1500.dwg

02/01/2013

