
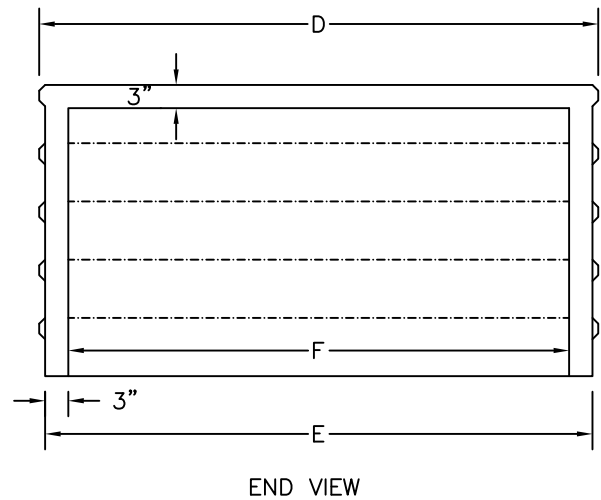


WEIGHT	RISERS						
	WIDTH	1	2	3	4	5	6
5'	1000#	1,635#	2,270#	2,975#	3,725#	4,520#	
6'	1175#	1,870#	2,600#	3,380	4,215#	5,085#	
8'	1,535#	2,375#	3,265#	4,200#	5,185#	6,215#	

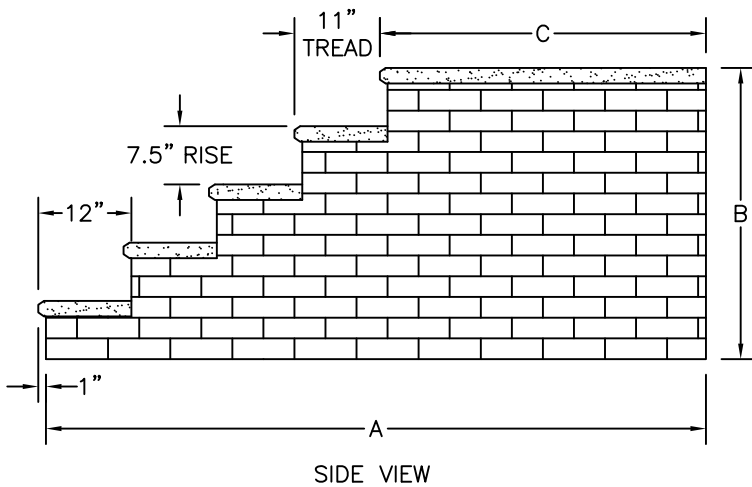

RISER	A NO PLAT	A 42\" PLAT	B HEIGHT
1	11¼"	41"	7½"
2	22½"	52"	15"
3	33¾"	63"	22½"
4	45"	74"	30"
5	56¼"	85"	37½"
6	67½"	96"	45"

D WIDTH	E OUTSIDE WIDTH	F INSIDE CORE WIDTH	C PLATFORM LENGTH
5'	58½"	51½"	42"
6'	71"	63½"	42"
8'	95"	86"	42"

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. WROUGHT IRON RAILS OPTIONAL.
3. TREADS AND PLATFORM GRANITE.



New England's Premier Precaster  
 800-696-7432 (SHEA)  
 www.sheaconcrete.com

BRICK STEPS WITH GRANITE  
 WIDTH: 5', 6', 8'

773 Salem Street  
 P.O. Box 520  
 Wilmington, MA 01887

87 Haverhill Road  
 P.O. Box 807  
 Amesbury, MA 01913

160 Old Turnpike Road  
 Nottingham, NH 03290

Page: A2.2

BrickGranite.dwg 12/01/2009

