



PLAN

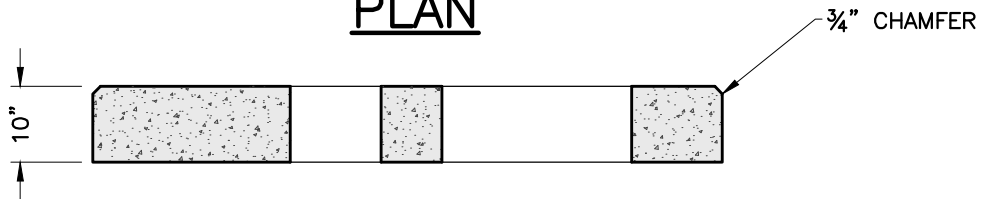

SECTION A-A

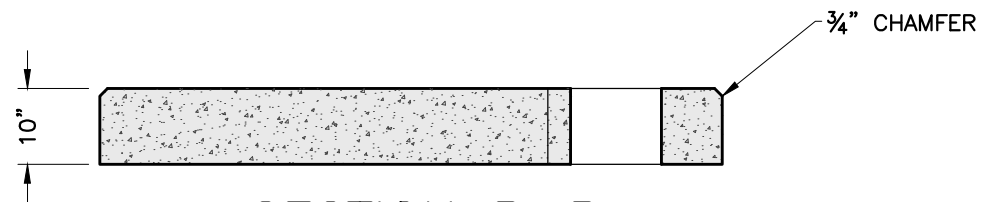

SECTION B-B

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN LOADING: AASHTO HS20-44, 0 TO 5 FEET COVER.
3. DESIGN SPECIFICATIONS - ACI 318 & AASHTO LOAD FACTOR DESIGN METHOD.
4. STEEL REINFORCEMENT CONFORMS TO ASTM A615, GRADE 60. MINIMUM COVER 1"

SHEA PRODUCT ID: NGMS2583

FILE NAME: NG 750-2500KVA

WEIGHT (LBS): 5275

DRAWN BY: L.P.

DATE: 1/4/2017

PAGE: I.V.E.3

