



PLAN

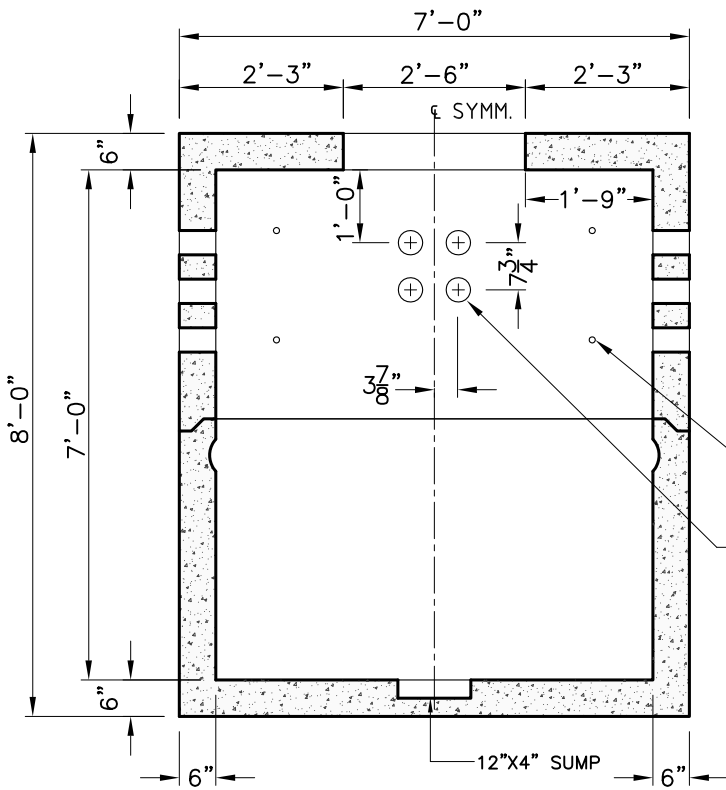

SECTION A-A
OPPOSITE WALL SIMILAR

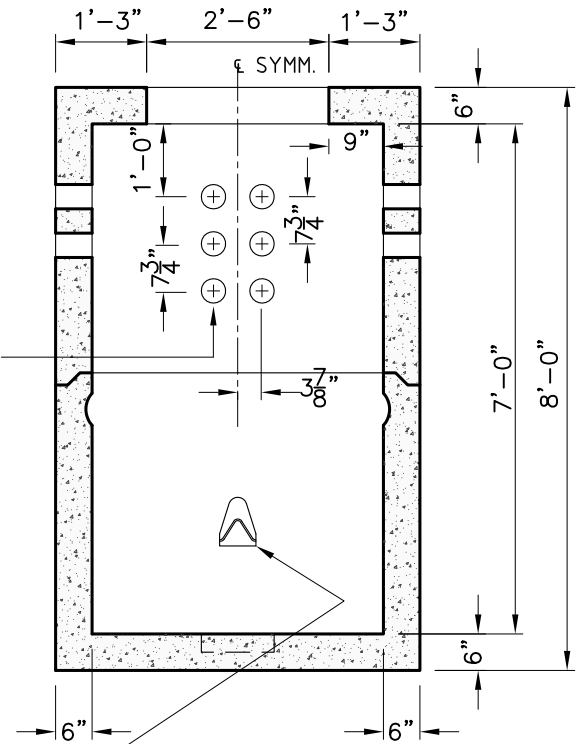

SECTION B-B
OPPOSITE WALL SIMILAR

1/2"Ø RECESSED NEW
PI-2 (POLYPROPYLENE)
PULLING IRONS

NOTES:

1. CONCRETE MINIMUM STRENGTH 5,000 PSI AFTER 28 DAYS.
2. STEEL REINFORCEMENT - ASTM A615, GRADE 60, 1" MIN. COVER.
3. DESIGNED FOR HS20-44 LOADING.



New England's Premier Precaster
800-696-7432 (SHEA)
www.sheaconcrete.com

UTILITY MANHOLE
4'-0" x 6'-0" x 7'-0"

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
Mail to: PO Box 520-Wilmington, MA 01887

Page: K2.9

UM 4x6X7.dwg

01/01/2013

