
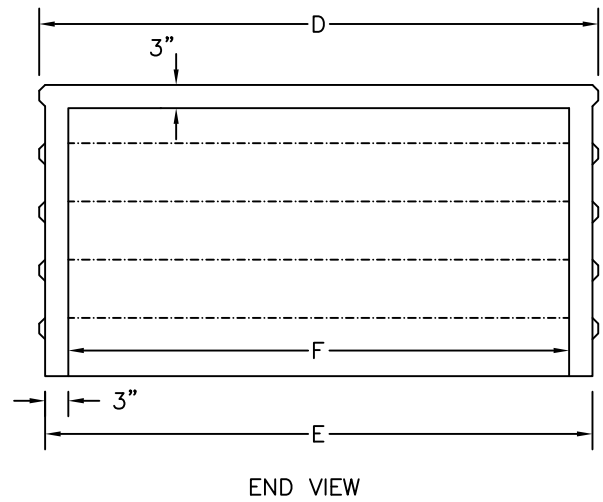


WEIGHT	RISERS						
WIDTH	1	2	3	4	5	6	7
4'	710#	1,135#	1,605#	2,615#	2,685#	3,295#	
5'	860#	1,355#	1,855#	2,420#	3,030#	3,685#	4,370#
6'	1010#	1,535#	2,100#	2,715#	3,380#	4,085#	4,840#
7'	1,160#	1,735#	2,350#	3,015#	3,730#	4,485#	5,290#
8'	1,310#	1,930#	2,600#	3,315#	4,075#	4,880#	
10'	1,600#	2,325#	3,090#	3,905	4,760#	5,670#	

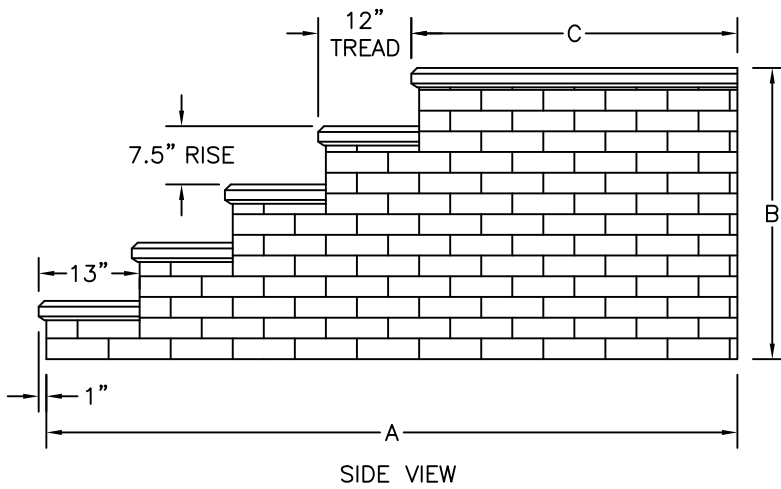

RISER	A NO PLAT	A 42" PLAT	B HEIGHT
1	12"	41"	7½"
2	24"	53"	15"
3	36"	65"	22½"
4	48"	77"	30"
5	60"	89"	37½"
6	72"	101"	45"
7*	84"	113"	52½"

D WIDTH	E OUTSIDE WIDTH	F INSIDE CORE WIDTH	C PLATFORM LENGTH
4'	46½"	39½"	42"
5'	58½"	51½"	42"
6'	71"	63½"	42"
7'	82"	74½"	42"
8'	95"	86"	42"
10'	119½"	110½"	42"

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. WROUGHT IRON RAILS OPTIONAL.
3. TREADS AND PLATFORM BROOM FINISHED, GRANITE OPTIONAL.
- *4. 7 RISER AVAILABLE IN 5', 6' AND 7' WIDE ONLY.



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

BRICK STEPS
 WIDTH: 4', 5', 6', 7', 8', 10'

773 Salem Street
 P.O. Box 520
 Wilmington, MA 01887

87 Haverhill Road
 P.O. Box 807
 Amesbury, MA 01913

160 Old Turnpike Road
 Nottingham, NH 03290

Page: A2.1

brickstp.dwg 12/01/2009

