


PLAN VIEW

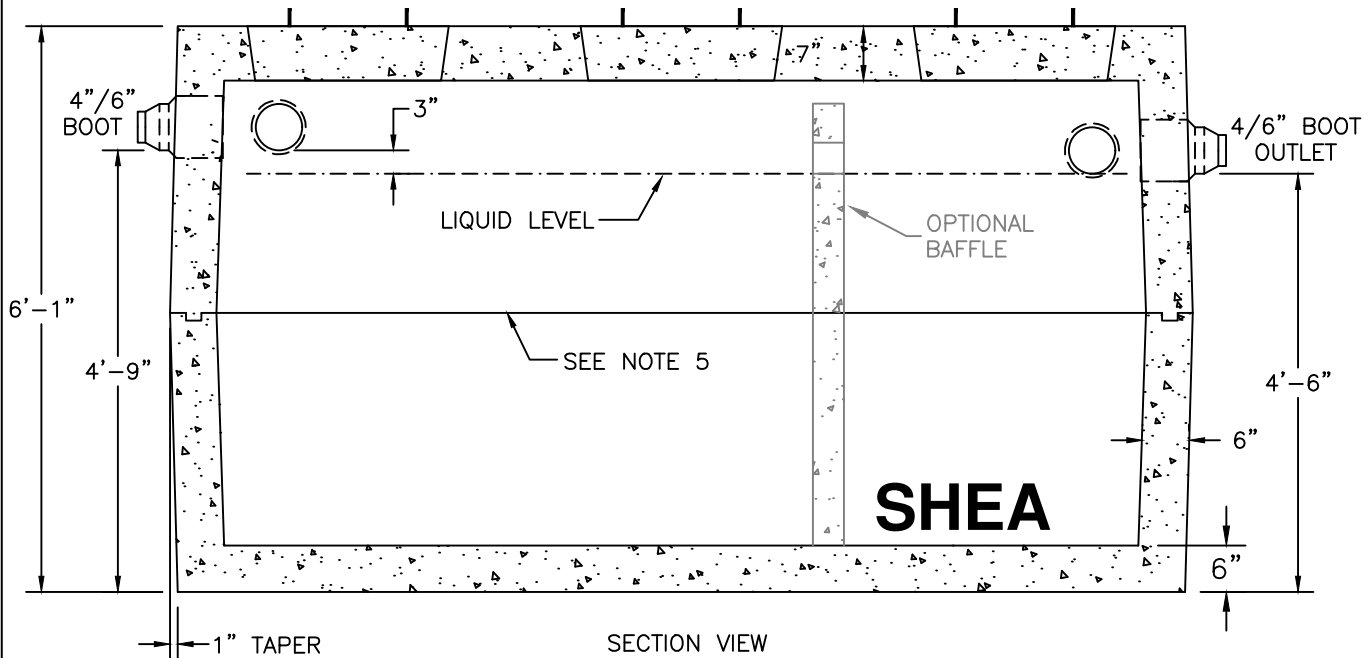

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227
4. DESIGNED FOR AASHTO HS-20 LOADING, COVER 1-5 FT
5. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.

	WEIGHT	TOP	BOTTOM
ITEM NO. TK-1500C	22,000#	11,500#	10,500#
TK-1500C2C	23,200#	12,100#	11,100#

SHEA PRODUCT ID: SEE TABLE

PREPARED FOR:

FILE NAME: ctk1500.dwg

WEIGHT (LBS): SEE TABLE

DRAWN BY: ARO

DATE: 06/01/18

PAGE: 11

