


PLAN VIEW

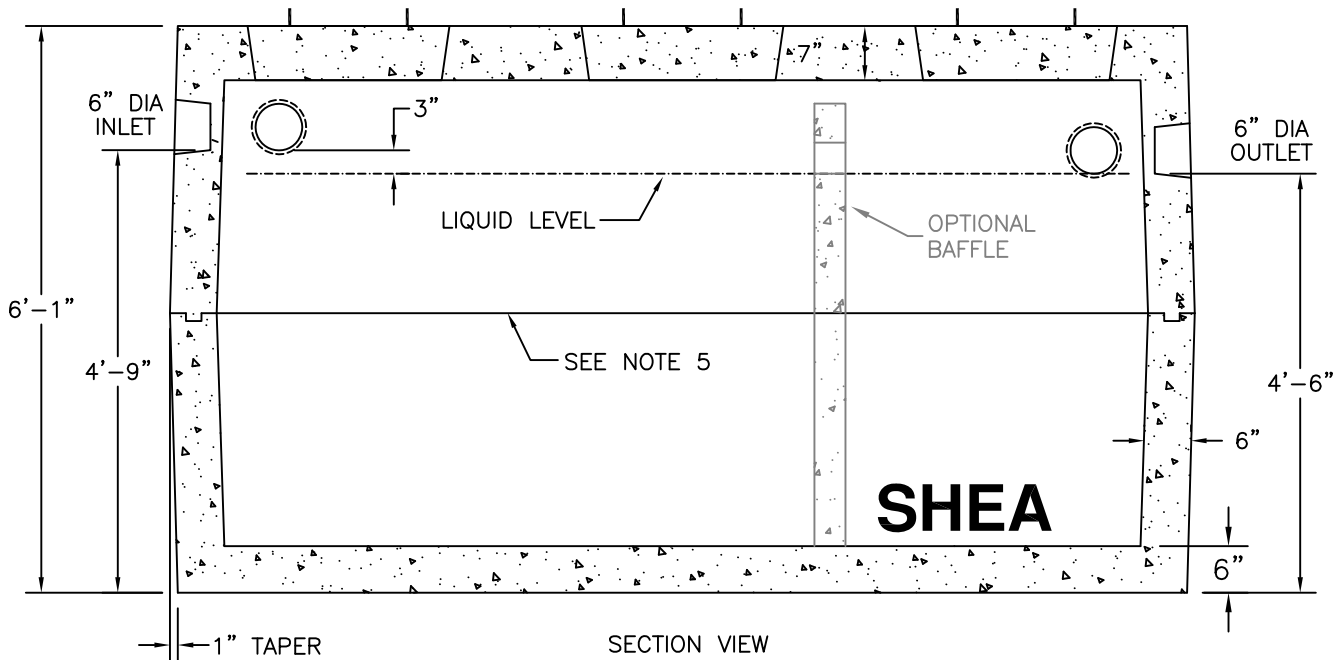

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. DESIGNED FOR H-20 LOADING.
5. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.

	WEIGHT
ITEM NO. TK-1500C	22,840#
TK-1500C2C	24,783#



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

COMMERCIAL LINE
 1500 GALLON SEPTIC TANK

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
 87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
 Mail to: PO Box 520-Wilmington, MA 01887

Page: I1

ctk1500.dwg

02/01/2013

