


PLAN VIEW

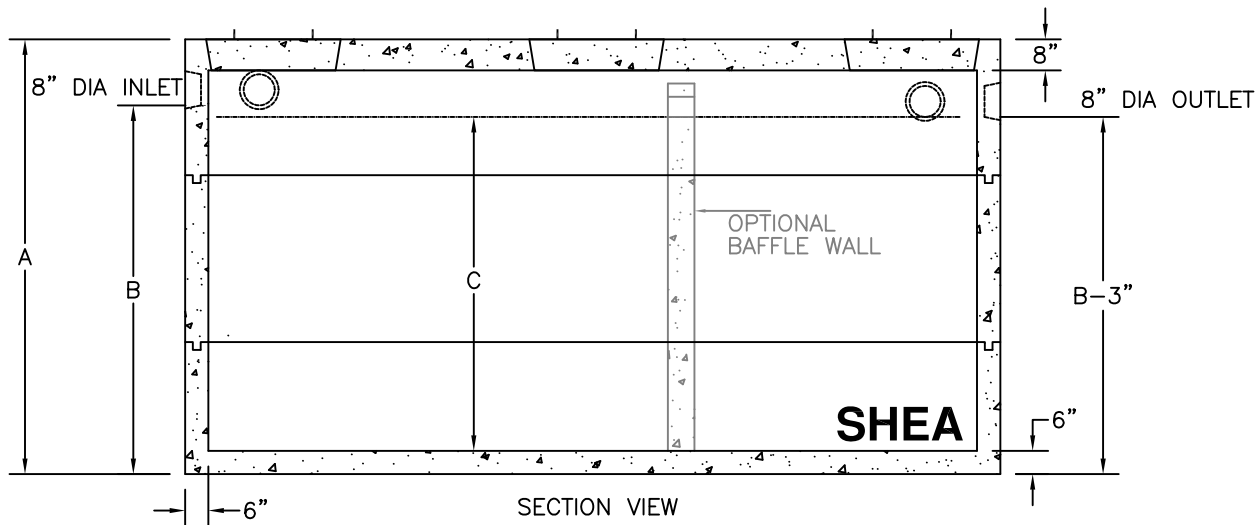

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS FOR ALTERNATIVE SYSTEMS WHERE A LIQUID LEVEL OF FOUR FEET IS NOT FEASIBLE.
3. ALL REINFORCEMENT PER ASTM C1227.
4. DESIGNED FOR H-20 LOADING, COVER 1-5 FT.
5. TONGUE AND GROOVE JOINT SEALED WITH BUTYL RESIN. INLET HEIGHT MAY INCREASE SLIGHTLY DUE TO THE BUTYL RESIN USED.
6. TEES AND BAFFLES SOLD SEPARATELY.

GALLONS	A (HEIGHT)	B* (INLET)	C (LIQUID)	WEIGHT (LBS)
2,500	63"	46'	37"	40,770
3,000	70"	53"	44"	43,240

\*SEE NOTE 5



*New England's Premier Precaster*  
 800-696-7432 (SHEA)  
 www.sheaconcrete.com

COMMERCIAL LINE LEDGE TANK  
 2500 TO 3000 GALLON

773 Salem Street—Wilmington, MA 153 Cranberry Hwy—Rochester, MA  
 87 Haverhill Road—Amesbury, MA 160 Old Turnpike Rd—Nottingham, NH  
 Mail to: PO Box 520—Wilmington, MA 01887

Page: I6

ctk8x17LG.dwg

02/01/2013

