


PLAN VIEW

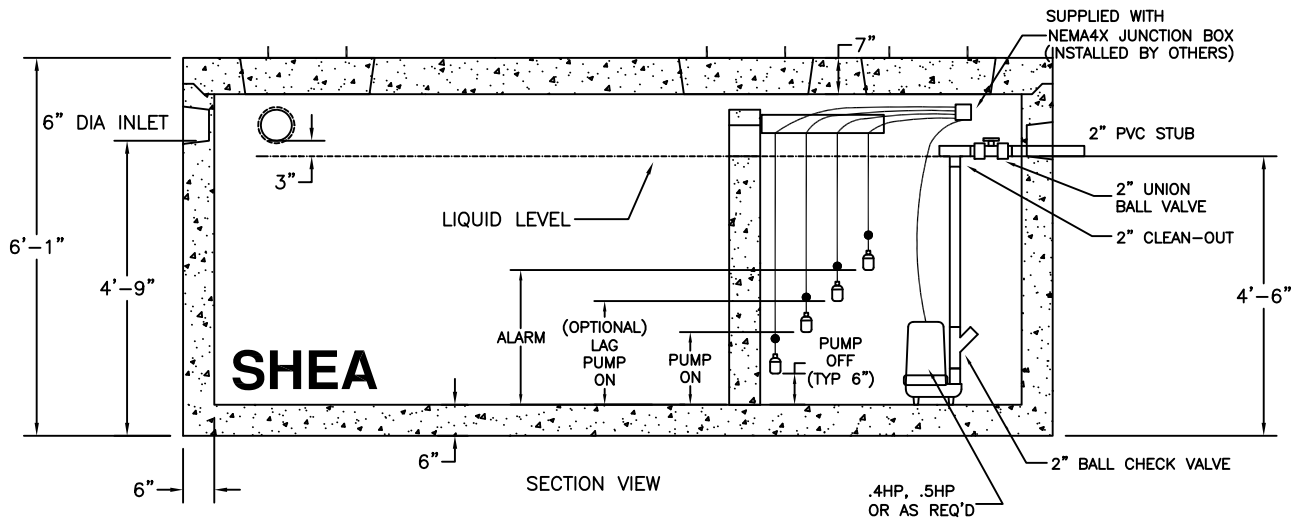

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. DESIGNED FOR H-20 LOADING.
6. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
7. TEES AND BAFFLES SOLD SEPARATELY.

WEIGHT 37,470#



New England's Premier Precaster  
 800-696-7432 (SHEA)  
 www.sheaconcrete.com

2500 GALLON COMMERCIAL COMBO TANK  
 DUPLEX PUMP

773 Salem Street  
 P.O. Box 520  
 Wilmington, MA 01887

87 Haverhill Road  
 P.O. Box 807  
 Amesbury, MA 01913

160 Old Turnpike Road  
 Nottingham, NH 03290

Page: C6.5

ctkM2500dp.dwg

9/19/2008

