
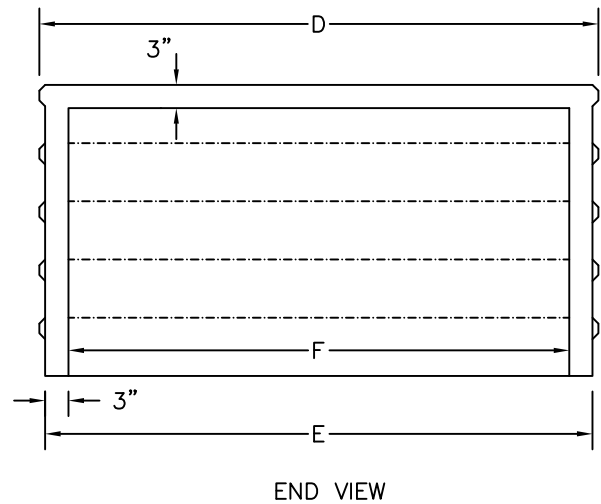


WEIGHT	RISERS							
	WIDTH	1	2	3	4	5	6	7
4'	670#	1,090#	1,555#	2,065#	2,625#	3,230#		
5'	815#	1,285#	1,800#	2,360#	2,965#	3,620#	4,320#	
6'	960#	1,480#	2,040#	2,650#	3,310#	4,010#	4,760#	
7'	1,100#	1,670#	2,280#	2,940#	3,650#	4,400#	5,200#	
8'	1,245#	1,860#	2,525#	3,235#	3,990#	4,790#		
10'	1,530#	2,250#	3,010#	3,820	4,670#	5,575#		

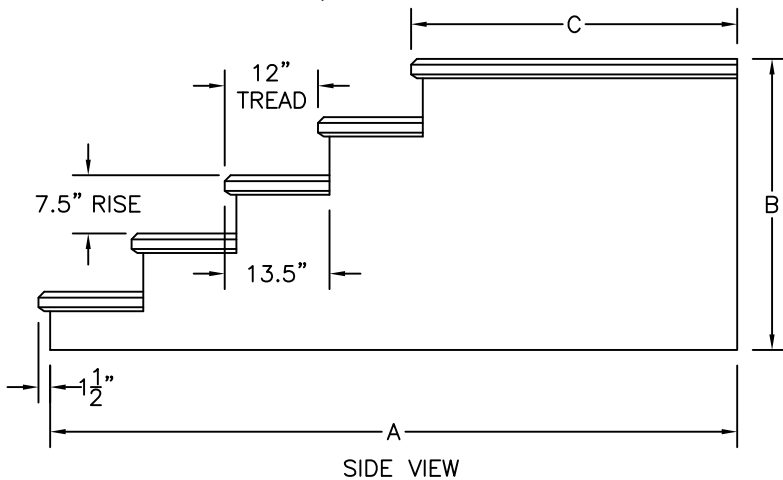

RISER	A NO PLAT	A 42" PLAT	B HEIGHT
1	12"	40½"	7½"
2	24"	52½"	15"
3	36"	64½"	22½"
4	48"	76½"	30"
5	60"	88½"	37½"
6	72"	100½"	45"
7*	84"	112½"	52½"

D WIDTH	E OUTSIDE WIDTH	F INSIDE CORE WIDTH	C PLATFORM LENGTH
4'	45½"	39½"	42"
5'	57½"	51½"	42"
6'	70"	63½"	42"
7'	81"	74½"	42"
8'	93"	86"	42"
10'	116"	110½"	42"

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. WROUGHT IRON RAILS OPTIONAL.
3. TREADS AND PLATFORM BROOM FINISHED.
- \*4. 7 RISER AVAILABLE IN 5', 6' AND 7' WIDE ONLY.
5. BRICK OR BRICK & GRANITE OPTIONAL.
6. WIDTH (E) INCREASES BY 1" FOR BRICK STEPS.



New England's Premier Precaster  
 800-696-7432 (SHEA)  
 www.sheaconcrete.com

STEPS STANDARD-7½" RISE  
 WIDTH: 4', 5', 6', 7', 8', 10'

773 Salem Street  
 P.O. Box 520  
 Wilmington, MA 01887

87 Haverhill Road  
 P.O. Box 807  
 Amesbury, MA 01913

160 Old Turnpike Road  
 Nottingham, NH 03290

Page: A1.1

steps7.5.dwg 12/01/2009

