


PLAN VIEW

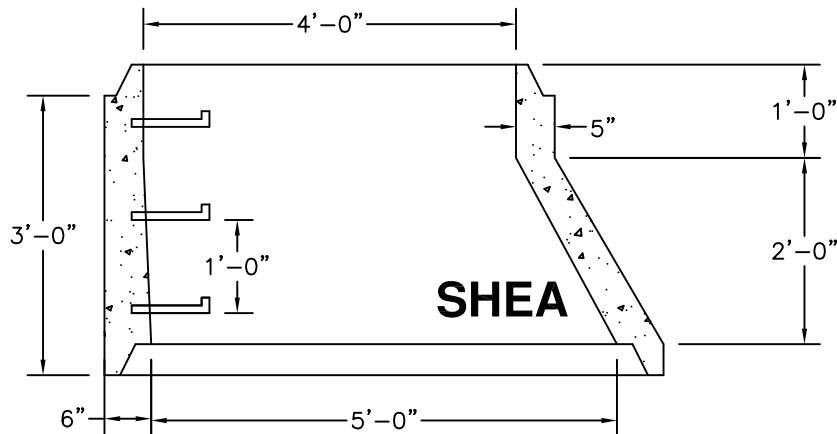

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. REINFORCED STEEL CONFORMS TO LATEST ASTM A185 SPEC. 0.15 SQ. IN./LINEAL FT. AND 0.15 SQ. IN.
3. H-20 DESIGN LOADING PER AASHTO HS-20-44; ASTM C478 SPEC FOR "PRECAST REINFORCED CONCRETE MANHOLE SECTIONS."
4. BUTYL RESIN SECTION JOINT CONFORMS TO LATEST ASTM C990 SPECIFICATION.
5. STEEL REINFORCED COPOLYMER POLYPROPYLENE PLASTIC STEP CONFORMS TO LATEST ASTM C478 SPEC.

ITEM NO. TRANScone



New England's Premier Precaster
 800-696-7432 (SHEA)
 www.sheaconcrete.com

TRANSITION CONE
 60" TO 48" DIA

773 Salem Street
 P.O. Box 520
 Wilmington, MA 01887

87 Haverhill Road
 P.O. Box 807
 Amesbury, MA 01913

160 Old Turnpike Road
 Nottingham, NH 03290

Page: G3.2

tran6048.dwg

6/13/2002

