




PLAN VIEW

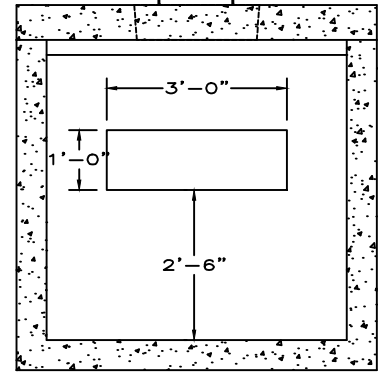

SECTION A-A VIEW

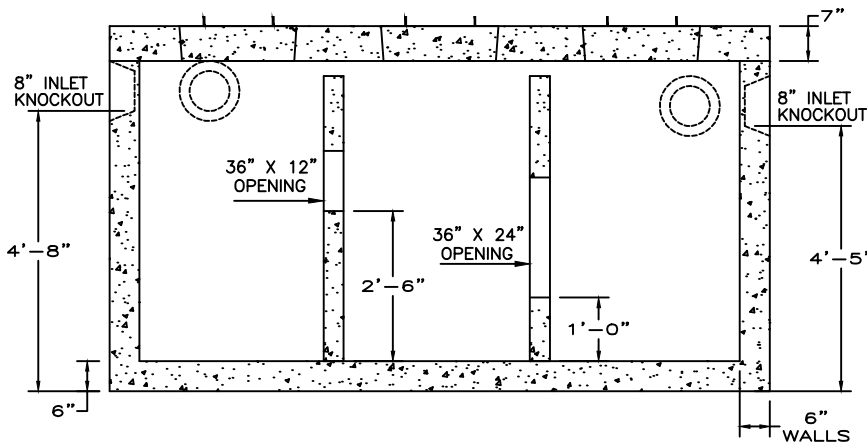


SECTION SIDE VIEW

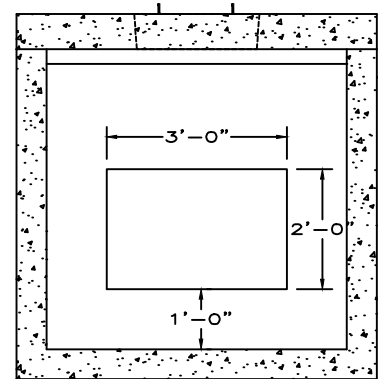

SECTION B-B VIEW

BAFFLE WALL DETAIL

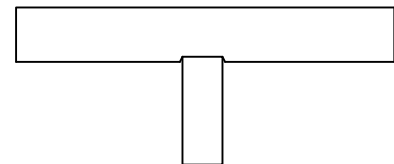

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGNED FOR AASHTO HS-20 LOADING, 1 TO 5 FT COVER
ALSO AVAILABLE IN H-10 LOADING WITH 3" WALL.
3. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.

SHEA PRODUCT ID:
M1500CSEP

PREPARED FOR:

FILE NAME:
1500Separator.dwg

WEIGHT (LBS):
24,400#

DRAWN BY:
ARO

DATE:
06/01/18

PAGE:
H2

