


PLAN

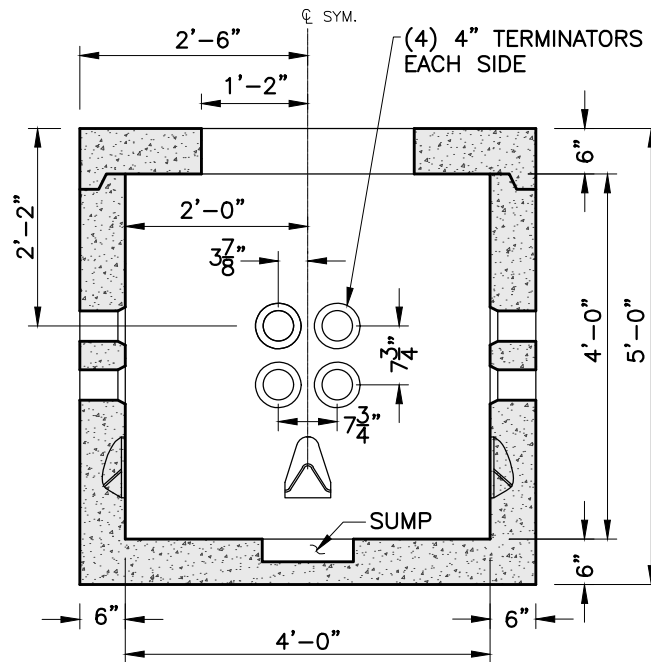

SECTION A-A
 CLOSED BOTTOM

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN LOADING: AASHTO HS20-44, 0 TO 5 FEET COVER.
3. STEEL REINFORCEMENT CONFORMS TO ASTM A615, GRADE 60.
4. MINIMUM STEEL COVER 1".
5. OPTIONAL OPENINGS AVAILABLE BY SPECIAL ORDER.

SHEA PRODUCT ID:	MH-444	FILE NAME:	MH 4X4X4		
WEIGHT (LBS):	8845	DRAWN BY:	L.P.	DATE:	2/5/2018
				PAGE:	I.C.2

