


PLAN VIEW

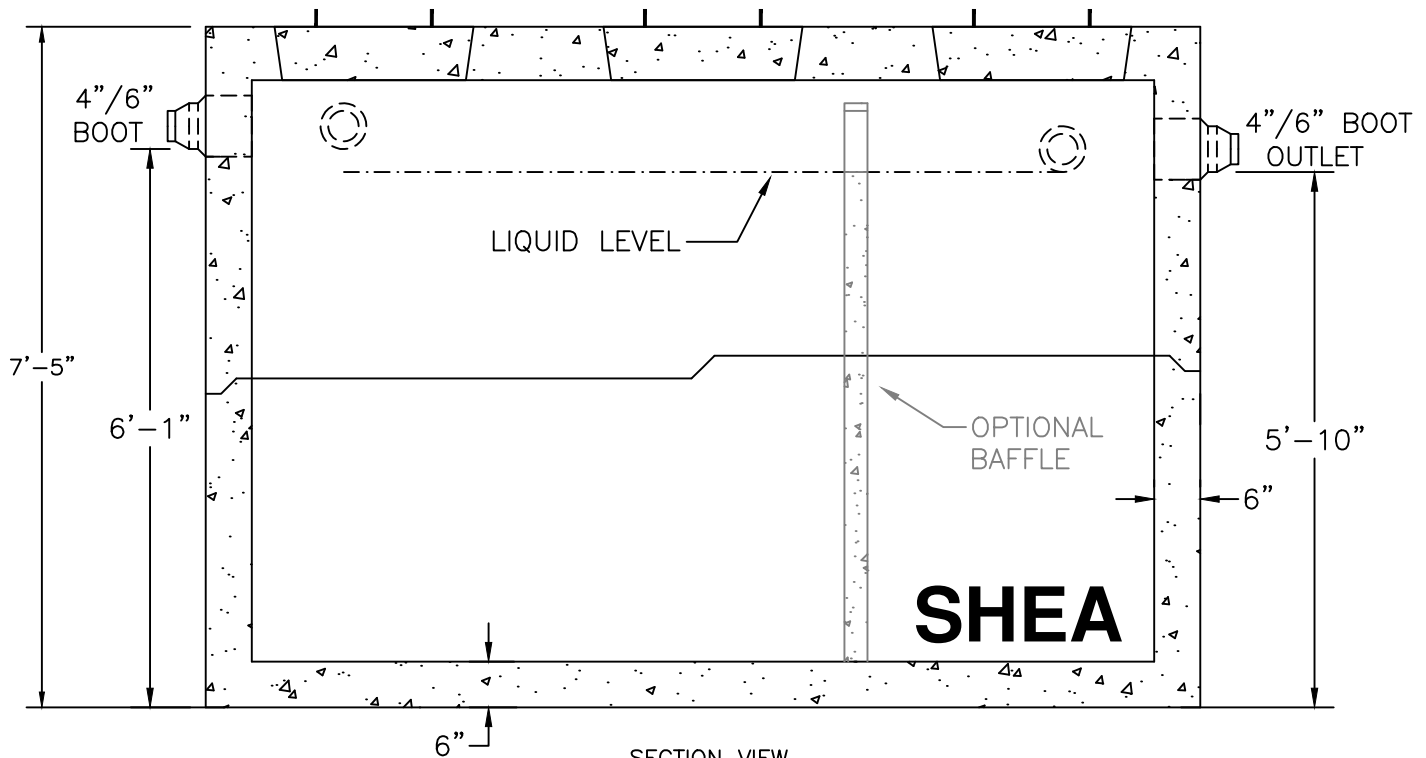

SECTION VIEW

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227
4. DESIGNED FOR AASHTO HS-20 LOADING, COVER 1-5 FT
5. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.

ITEM NO.		WEIGHT	
		TOP	BOT
TK-2000C	25,600#	13,655#	11,945#
TK-2000C2C	27,340#	14,515#	12,825#

SHEA PRODUCT ID:
SEE TABLE

PREPARED FOR:

FILE NAME:
ctk2000.dwg

WEIGHT (LBS):
SEE TABLE

DRAWN BY:
ARO

DATE:
03/01/2018

PAGE:
13

