


TOP VIEW

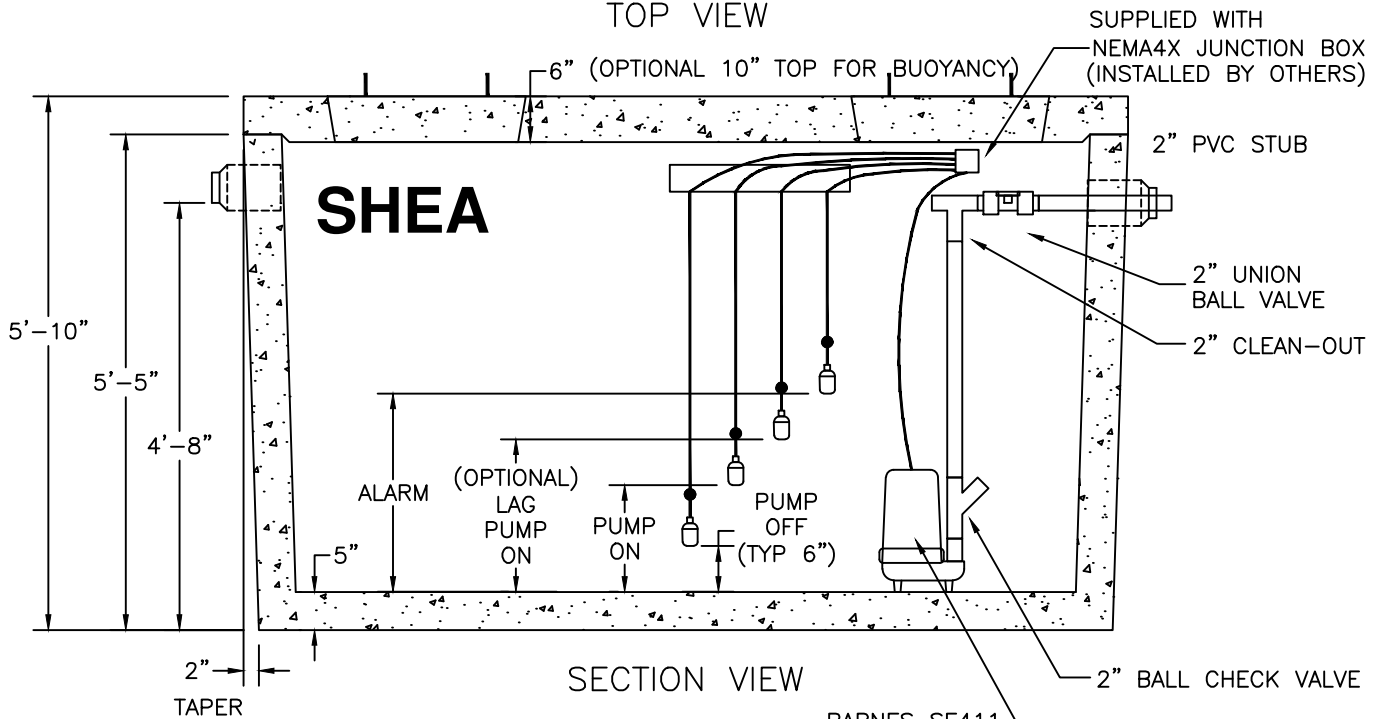

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. CONSTRUCTION OF PUMP CHAMBER CONFORMS WITH DEP TITLE 5 REGS, 310 CMR, SECTION 15.226.
3. ALL REINFORCEMENT PER ASTM C1227.
4. JOINT SEALED WITH BUTYL RESIN.
5. DESIGNED FOR AASHTO HS-20 LOADING, COVER 1 TO 5 FEET.
6. PUMPS, FLOATS AND PIPE INSTALLED IN CHAMBER. FLOAT ELEVATIONS SET UPON REQUEST.
7. SUPPLIED WITH PUMP CONTROL PANEL W/ALARM.
8. LAG & ALARM FLOATS CAN BE SWAPPED OR COMBINED INTO ONE FLOAT.

SHEA PRODUCT ID:  
PC1000P4D/PC1000P5D

PREPARED FOR:

FILE NAME:

pcM1000PD

WEIGHT (LBS):  
17,210#

DRAWN BY: ARO

DATE: 06/01/18

PAGE: C6.4

