
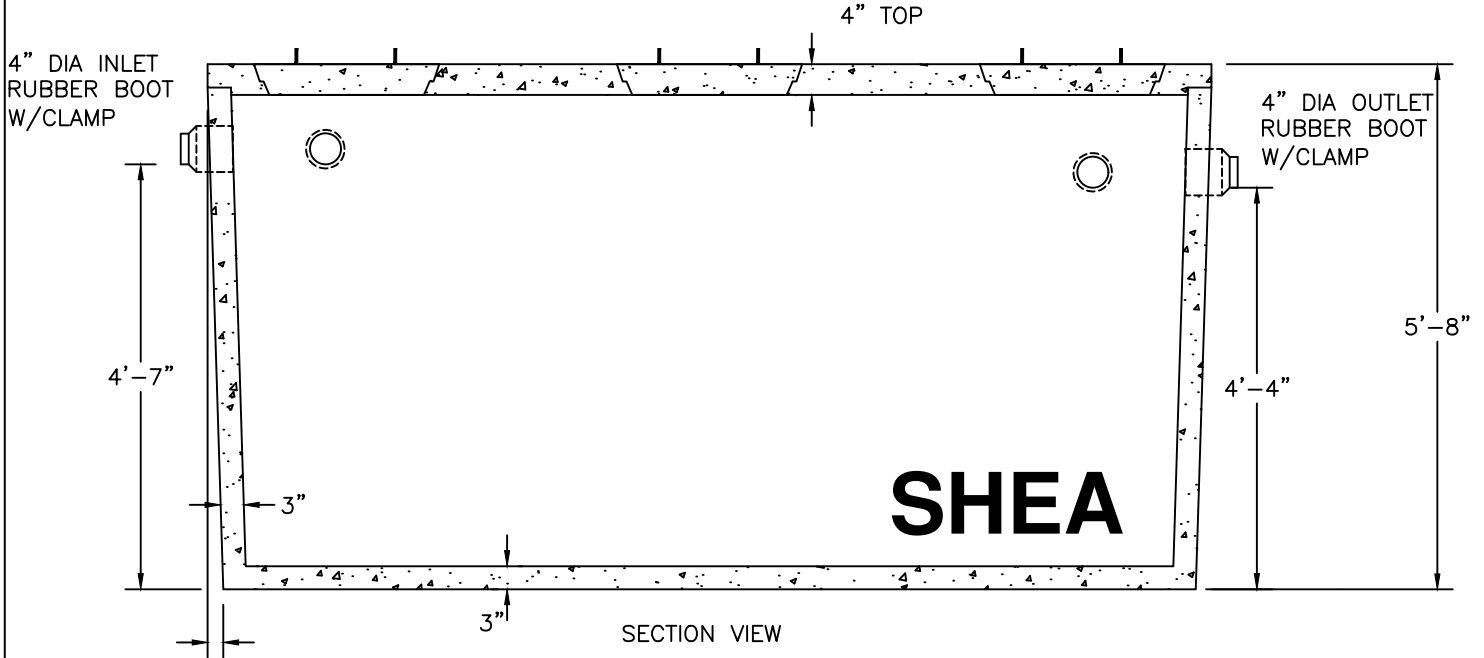


1500 GAL PUMP CHAMBER
MONOLITHIC 3" WALL

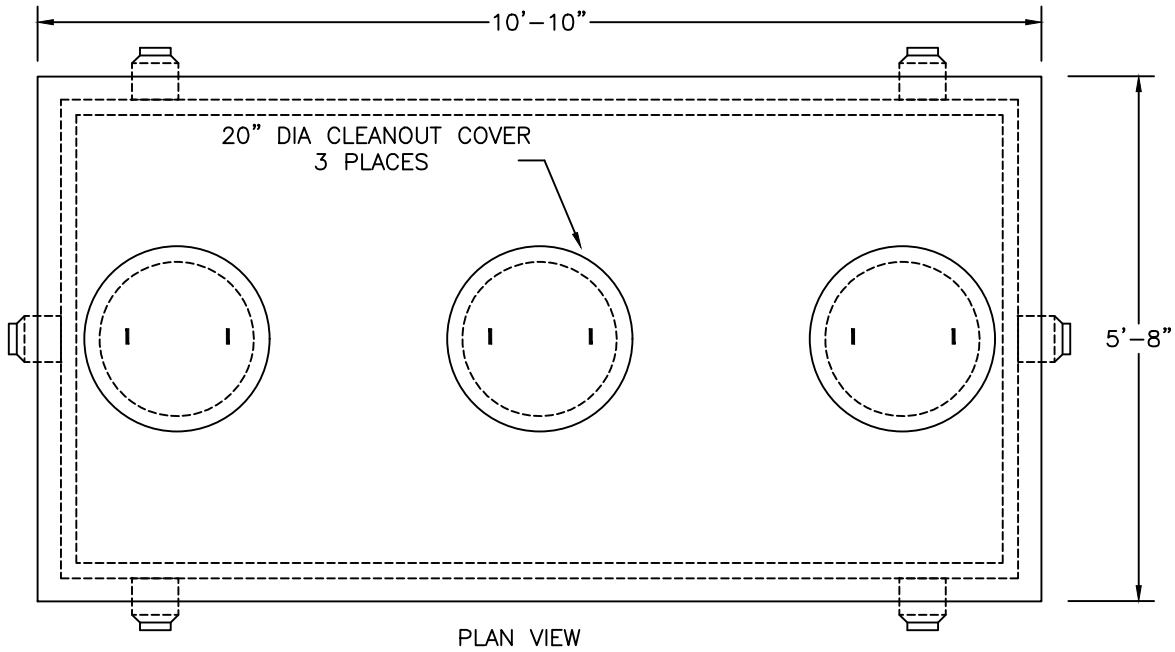

2" TAPER

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.000, DEP TITLE 5 REGS, FOR PUMP CHAMBERS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. JOINT SEALED WITH BUTYL RESIN.
5. IF COVER EXCEEDS 4 FEET, HEAVY DUTY TANK REQUIRED.
ALSO AVAILABLE IN AASHTO HS-20 LOADING.
6. PUMPS AND ACCESSORIES OPTIONAL.

ITEM NO.	TK-M1500	STANDARD	WEIGHT
			11,035#
		TOP SECTION (4")	3,035#
		BOTTOM SECTION (65")	8,000#

SHEA PRODUCT ID:
M1500

PREPARED FOR:

FILE NAME: pcM1500-3.dwg

WEIGHT (LBS): 11,035#

DRAWN BY: ARO

DATE: 06/01/18

PAGE: C5.1

