



PLAN VIEW

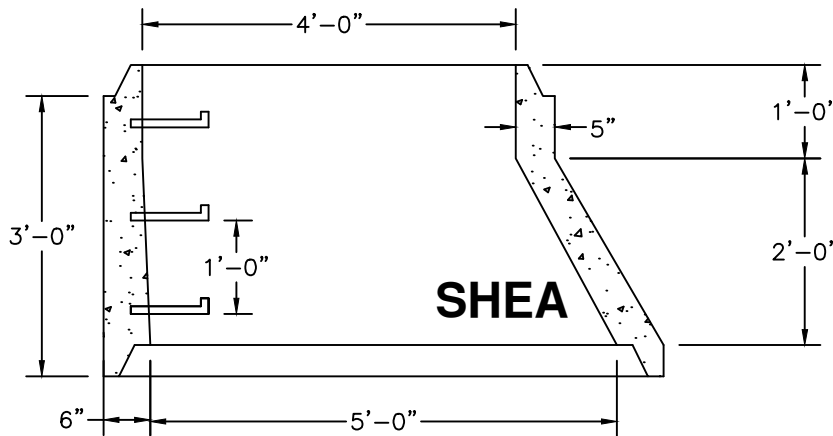

SECTION VIEW

NOTES:

1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. REINFORCED STEEL CONFORMS TO ASTM A185 SPEC. 0.15 SQ. IN./LINEAL FT. AND 0.15 SQ. IN. (BOTH WAYS) BASE BOTTOM.
3. DESIGN LOADING PER AASHTO HS-20, COVER 1 TO 5 FEET.
4. MANHOLE DESIGN SPECS CONFORM TO ASTM C478 SPEC FOR "PRECAST REINFORCED CONCRETE MANHOLE SECTIONS."
5. BUTYL RESIN SECTION JOINT CONFORMS TO ASTM C990 SPECIFICATION.
6. STEEL REINFORCED COPOLYMER POLYPROPYLENE PLASTIC STEP CONFORMS TO ASTM C478 SPEC.

SHEA PRODUCT ID: TRANSCONE	PREPARED FOR:	FILE NAME: tran6048.dwg	
WEIGHT (LBS): 6,150#	DRAWN BY: ARO	DATE: 06/01/18	
773 Salem Street-Wilmington, MA   153 Cranberry Hwy-Rochester, MA   87 Haverhill Road-Amesbury, MA   160 Old Turnpike Rd-Nottingham, NH			