


PLAN VIEW

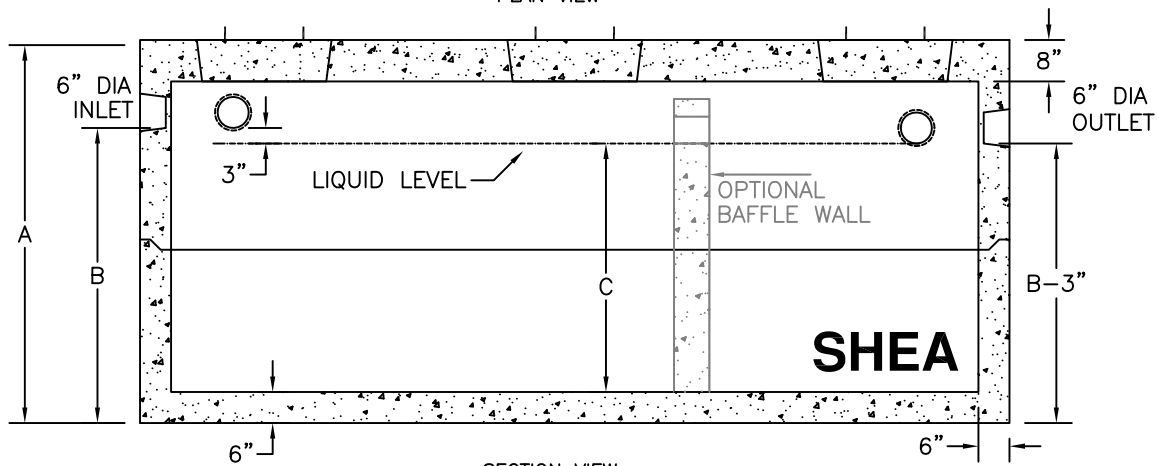

SECTION VIEW

SINGLE COMPARTMENT TANK

GALLONS	A (HEIGHT)	B (INLET)	C (LIQUID)	WEIGHT (LBS)	ITEM NO.
3,000	83"	66"	57"	37,220	CTK-3000
3,500	94"	77"	68"	39,810	CTK-3500
4,000	103"	86"	77"	42,400	CTK-4000

TWO COMPARTMENT TANK

GALLONS	A (HEIGHT)	B (INLET)	C (LIQUID)	WEIGHT (LBS)	ITEM NO.
3,000	83"	66"	57"	40,200	CTK-30002C
3,500	94"	77"	68"	43,220	CTK-35002C
4,000	103"	86"	77"	46,240	CTK-40002C

COMPONENTS: 41" & 51" BOTTOM
42" & 52" TOP

NOTES:

1. CONCRETE: 5,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227.
4. DESIGNED FOR H-20 LOADING.
5. TONGUE & GROOVE JOINT SEALED WITH BUTYL RESIN.
6. TEES AND BAFFLES SOLD SEPARATELY.



New England's Premier Precaster
800-696-7432 (SHEA)
www.sheaconcrete.com

COMMERCIAL LINE TANK
3000 TO 4000 GALLON

773 Salem Street-Wilmington, MA 153 Cranberry Hwy-Rochester, MA
87 Haverhill Road-Amesbury, MA 160 Old Turnpike Rd-Nottingham, NH
Mail to: PO Box 520-Wilmington, MA 01887

Page: 15

ctk8x14.dwg 02/01/2013

